



P150MR

PELECTRO-HYDRAULIC PRESS

AUTOMATIC DOUBLE-SPEED WITH FAST APPROACH



150 tons

Heavy-duty electro-hydraulic press, **entirely laser-cut**. Extra- solid structure without welded points. Power unit with submerged motor **400V 50-60 Hz**, automatic double-speed pump calibrated at **20 Bar** (from fast approach to working speed) and a pump to adjust pressure through a knob. Fitted with a safety valve that prevents machine overpressure.

A manometer mounted on the distributor indicates working pressure. Optional available on request: **V blocks, plates, electric speed control device, perimeter protection and limit switch.**

Cylinder stroke 500mm as standard.

Technical data		
	UM	P150MR
Max capacity	[tons]	150
Approaching speed	[mm/min]	1450
Working speed	[mm/min]	115
Max capacity in fast mode	[l/min]	65
Max capacity in slow mode	[l/min]	5
Cylinder stroke	[mm]	500
Cylinder bore center	[mm]	235
Stem diameter	[mm]	110
Shank diameter	[mm]	M30
Tank capacity	[litri]	50
Max pressure	[bar]	350
Tension	[V]	400
Frequency	[Hz]	50-60
Motor power	[kW]	3
Max power adsorption	[A]	7.3
Weight	[kg]	1300

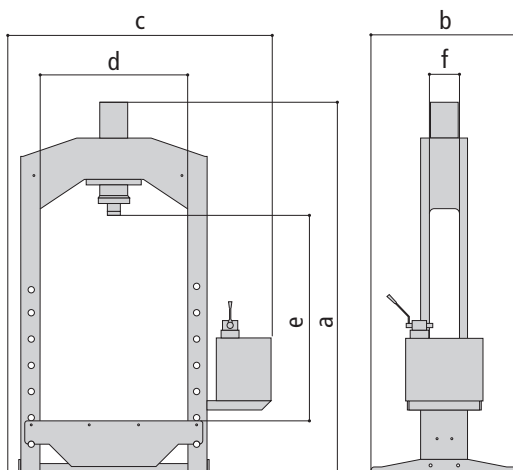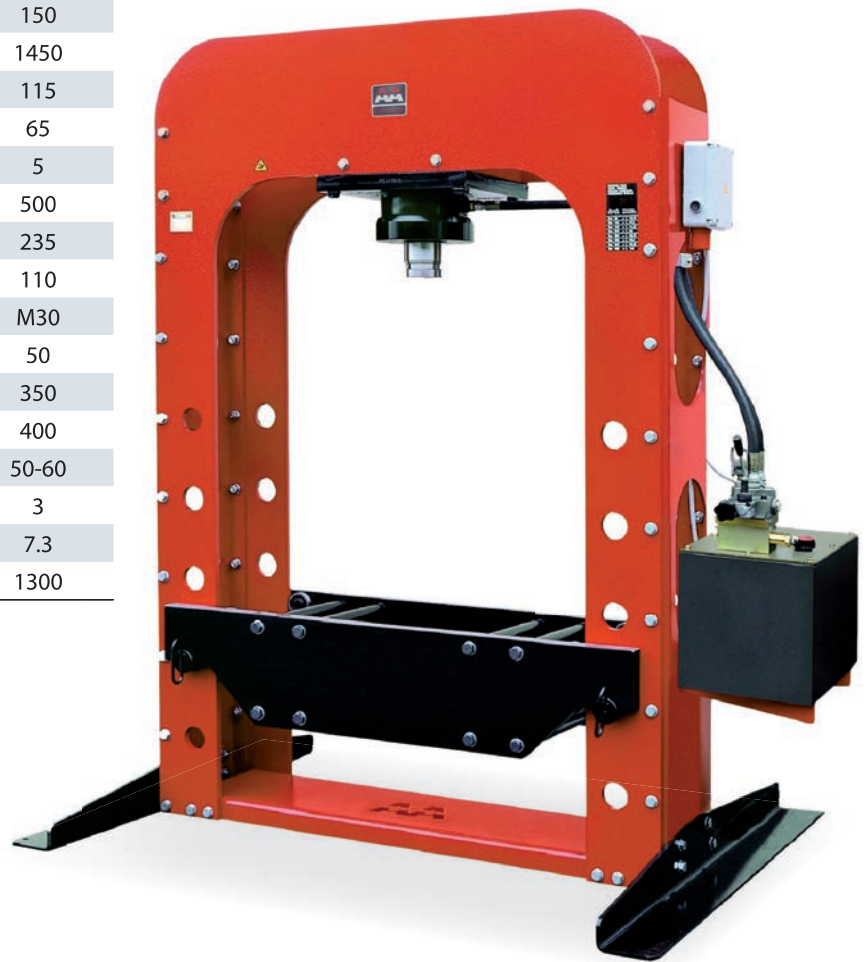

Dimensions						
	a	b	c	d	e	f
P150MR	2100	1280	1880	1004	1000	280